




**EDGE**



food



agriculture



transport



public sectors



industry

high pressure cleaners

# POWER BOX




## POWER BOX

- 4 pole electrical motor (1450 RPM) with thermal protection.
- Three ceramic coated pistons brass axial pump head with built-in by-pass valve.
- Suction and Delivery S/S valves.
- DSP: Direct Shut down Protection on single phase • LSP: Late Shut down Protection 24V
- Pressure regulator.
- Glycerine pressure gauge.
- Pressure accumulator.
- Double adjustable detergent/wax selector.
- Max water inlet temperature 40° C.

### Optional:

- Hose-reel code 6.608.0009
- Version with high-pressure supplying detergent tank.
- Stainless steel version.

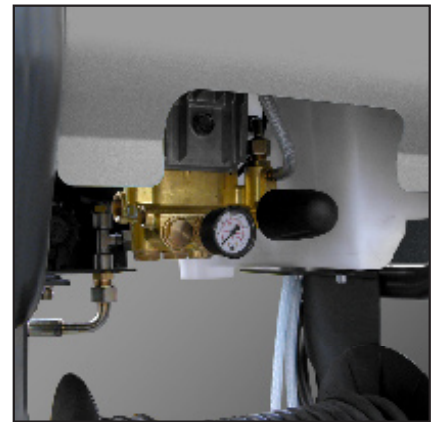

	POWER BOX 12-100	POWER BOX 15-200	POWER BOX 12-100 STAINLESS	POWER BOX 15-200 STAINLESS
Code	2440	2441	2442	2443
operat. pressure	100 bar	200 bar	100 bar	200 bar
operat. pressure	1470 psi	2940 psi	1470 psi	2940 psi
delivery rate	11 l/min	15 l/min	11 l/min	15 l/min
abs. power/voltage	2800W- 240V~50Hz (Ph1)	7000W- 415V~50Hz (Ph3)	2800W- 240V~50Hz (Ph1)	7000W- 415V~50Hz (Ph3)
RPM	1450	1450	1450	1450
detergent tank	-	-	-	-
inlet max temperature	40° C	40° C	40° C	40° C
machine dimensions	78x60x47	78x60x47	78x60x47	78x60x47
machine weight	47 Kg / 103.0 lbs	49 Kg / 107.9 lbs	47 Kg / 103.0 lbs	49 Kg / 107.9 lbs